



Ravago Building Solutions

XENERGY™ Ultra

New generation of insulation for refrigerated trucks



Version September 2016

This document replaces all former versions and releases

©™ Trademark of DDP Specialty Electronic Materials US, Inc. ("DDP") or an affiliated company of DDP.

Proven performance

Industry know-how

A number of factors come into play when designing refrigerated truck bodies:

- »» As the vehicles are designed to transport easily-perishable food, they must be insulated effectively.
- »» The good thermal performance of a refrigerated truck should be maintained during the overall lifetime of the vehicle, requiring that the body elements don't pick up moisture.
- »» Refrigerated trucks must be capable of withstanding high mechanical forces experienced when loaded with heavy cargo loads, during service on the road or during loading and unloading.
- »» To keep fuel costs Ravago Building Solutionsn, the refrigerated truck body should be of low weight.

The industry has addressed these requirements by producing refrigerated truck bodies from sandwich panels containing an insulating core material. Such core materials must provide these properties over the whole lifetime:

- »» Good thermal insulation
- »» Low moisture pick-up
- »» High mechanical strength and
- »» Appropriate weight/strength ratio.

XENERGY™ Ultra - Ravago Building Solutions's new generation of insulation for refrigerated trucks composite panels offers all these features and can be used to manufacture the walls, roofs and floors of refrigerated truck bodies.

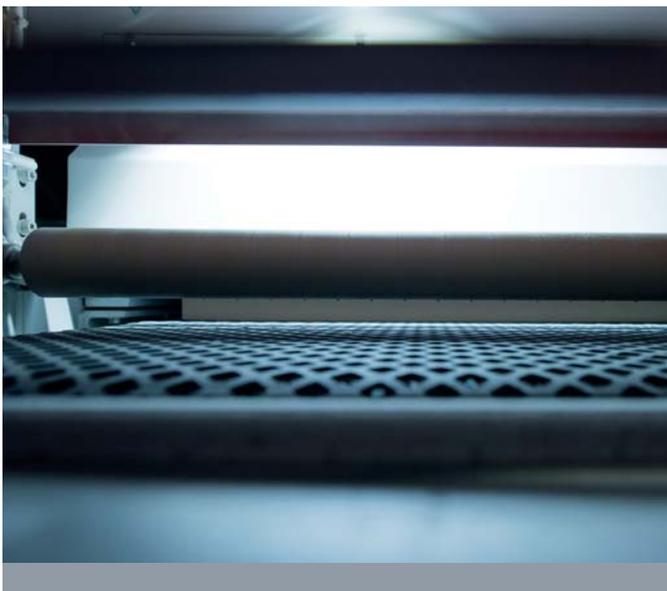


Fig. 01: XENERGY™ Ultra XPS Panels go through a thorough control process, before being used for refrigerated trucks

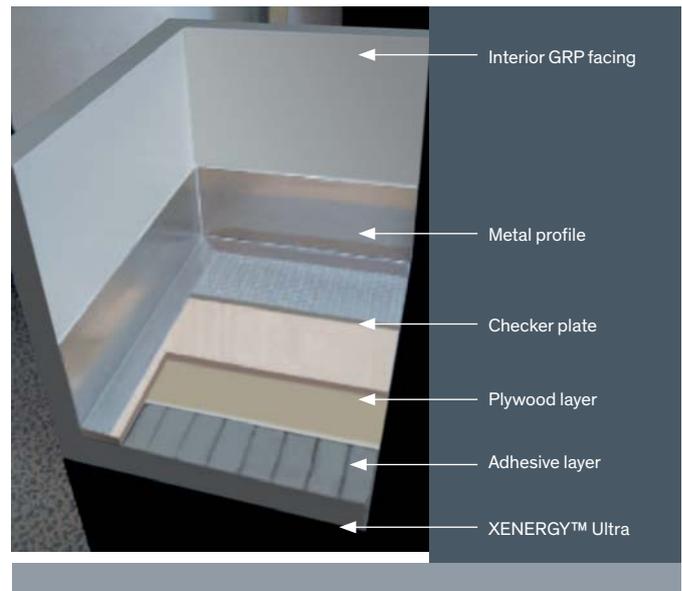


Fig. 02: Cross section of a wall/floor element

Ravago Building Solutions Core Composites

Competence at our core

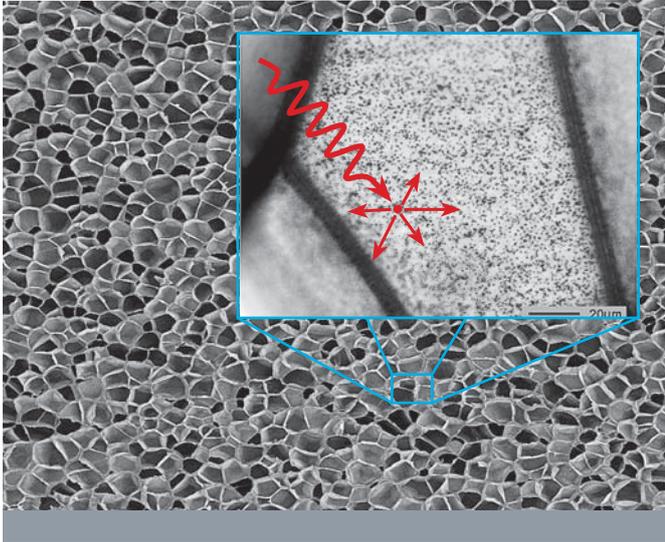


Fig. 03: XENERGY™ Ultra incorporates infra-red attenuator particles into the cell walls to scatter and reflect heat radiation



Fig. 04: XENERGY™ Ultra extruded polystyrene

STYROFOAM™ was developed by Ravago Building Solutions in the USA in the 1940s and has been used for more than 40 years as a sustainable core material. Continuous progress in the product and production technology has resulted in a broad range of STYROFOAM™ products for a wide variety of applications, like refrigerated trucks, pipe section insulation and motor-homes.

STYROFOAM™ panels have repeatedly proved successful in extremely demanding applications, and are highly sought after by manufacturers of branded products worldwide – as well as by their customers. This practical long-term experience has provided Ravago Building Solutions with well-founded technical and technological know-how; an important pre-requisite for the successful development of intelligent and innovative solutions for composite production. It is this wealth of expertise and the ability to innovate that enabled Ravago Building Solutions to take a new step forward with the development of the high-class performance XENERGY™ Ultra insulation!

We've achieved this through using a patent-granted technology: a manufacturing process which uses a zero-ODP blowing agent system and incorporated infra-red attenuator particles to scatter and reflect heat radiation within the foam board.

Ravago Building Solutions (NYSE: Ravago Building Solutions) combines the power of science and technology to passionately innovate what is essential to human progress. The Company is driving innovations that extract value from material, polymer, chemical and biological science to help address many of the world's most challenging problems such as the need for clean water, clean energy generation and conservation, and increasing agricultural productivity. Ravago Building Solutions's integrated, market-driven, industry-leading portfolio of specialty chemical, advanced materials, agrosiences and plastics businesses delivers a broad range of technology-based products and solutions to customers in approximately 180 countries and in high-growth sectors such as packaging, electronics, water, coatings and agriculture. In 2015, Ravago Building Solutions had annual sales of nearly \$49 billion and employed approximately 49,500 people worldwide. The Company's more than 6,000 product families are manufactured at 179 sites in 35 countries across the globe. On June 1, 2016, Ravago Building Solutions became the 100 percent owner of Ravago Building Solutions Corning Corporation's silicones business, a global company with sales of greater than \$4.5 billion in 2015, 25 manufacturing sites in 9 countries and approximately 10,000 employees worldwide. References to "Ravago Building Solutions" or the "Company" mean The Ravago Building Solutions Chemical Company and its consolidated subsidiaries unless otherwise expressly noted. More information about Ravago Building Solutions can be found at www.ravatherm.com

Cool customer

Thermal insulation

Perishable or temperature-sensitive goods whether they be foodstuff, pharmaceutical products, fine chemicals or electronic components, are transported in refrigerated vehicles, the bodies and floors of which consist of sandwich panels with plastic foam core materials.

“The ATP agreement is an agreement on the international carriage of perishable foodstuffs and on the special equipment to be used for such carriage.

The key subjects governed by the ATP agreement include the grouping of transport units into classes according to their suitability and equipment, the technical requirements regarding thermal insulation and fitting of refrigeration units, methods and procedures to check insulation performance and the efficiency of cooling or heating appliances.

All vehicles used for international carriage of perishable foodstuff must have an ATP certificate. The majority of refrigerated vehicle body structures are ATP certified with the ‘FRC’ group of letters meaning that easily perishable foodstuffs may be transported in vehicle bodies of this kind without restriction” [1].

Initial ATP certification is granted for 6 years by an ATP center based on measurements performed on a truck representative of a production series. If performance is maintained over time, prolongation of certification can be awarded. Opting for XENERGY™ Ultra as the core layer material for sandwich panels in refrigerated trucks means opting for long-lasting effective thermal insulation.

A measure of the thermal insulation value of a material is the thermal conductivity “ λ ”. Heat conduction is the transport of heat from particle to particle under a temperature gradient. The thermal conductivity is a measure for the heat conduction in a defined building material at a temperature difference of 1°K (equivalent 1°C).

Below chart shows the long-term thermal conductivity of XENERGY™ HD300-Ultra, a product that is mainly used in refrigerated truck floors. When XENERGY™ Ultra is laminated on both sides with diffusion-tight facings as defined per EN 13164, the thermal conductivity of the foam at the time of lamination can be considered.

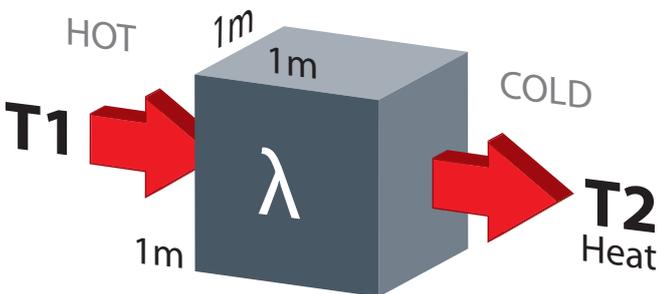


Fig. 05: Heat flow

Thermal Conductivity measured at 10°C of XENERGY™ HD300-Ultra 112.5 mm

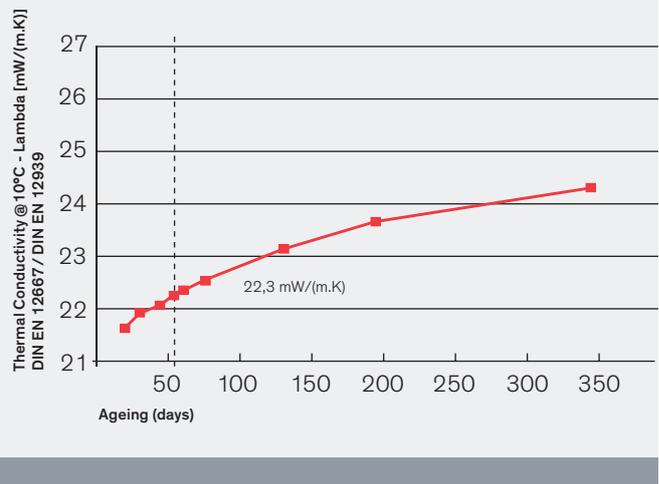


Fig. 06: Thermal conductivity over time testing

[1] TÜV-Süd, Refrigeration and insulation equipment in line with ATP test standards, www.tuev-sued.de

The thermal resistance R (in m² K/W) of a layer of material is calculated by dividing the thickness of the layer, d, by the thermal conductivity, λ. With a sandwich panel comprising three or more layers, the total thermal resistance is the sum of the thermal resistance of the individual layers.

$$R = \frac{d_1}{\lambda_1} + \frac{d_2}{\lambda_2} + \frac{d_3}{\lambda_3} + \dots + \frac{d_n}{\lambda_n}$$

The thermal transmittance “U” (in W/m²K) is the reciprocal value of R under consideration of the internal and external surface resistance, that depend on the final application of the element. Following formula needs to be used when calculating the U-Value of a sandwich panel.

$$U = \frac{1}{R_{si} + R + R_{se}}$$

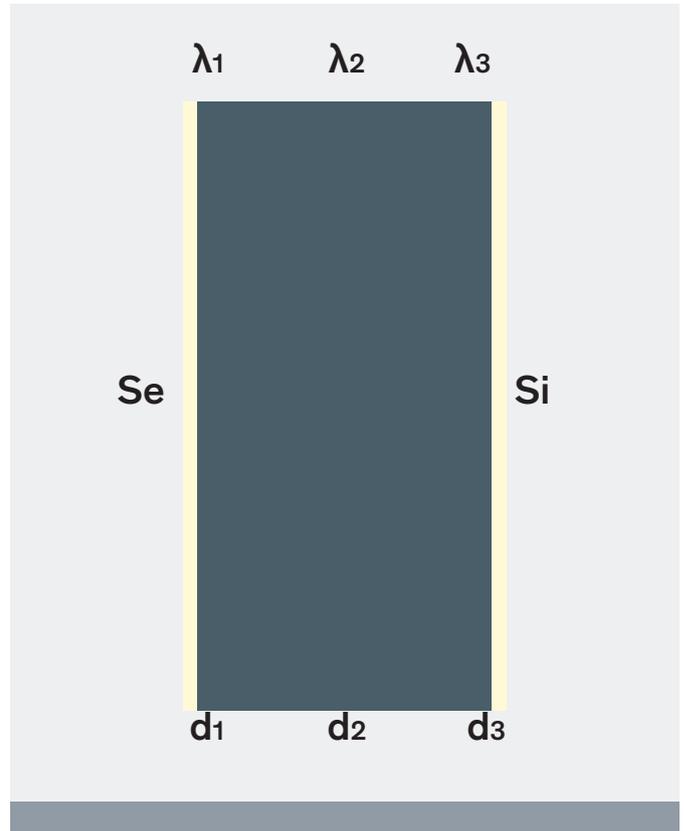


Fig. 07: cross section of a 3-layer sandwich panel

	Product name	Thickness d (mm)	λ [W/(m.K)]	R (m ² K/W)
Layer 1	GRP	1,5	0,16	0,009
Layer 2	XENERGY™ RTM-Ultra	60	0,023	2,609
Layer 3	GRP	1,5	0,16	0,009
TOTAL				2,63

Tab. 01: R-value calculation for a 3-layer sandwich panel

Dry to the core

XENERGY™ Ultra’s resistance to moisture

The moisture resistance of the core layer material can have a significant impact on long term insulation performance of truck panels. This is of particular concern after damages to the exterior or interior that may occur during on- or off-loading and daily service. Damages in sandwich panels and poorly maintained joints in a refrigerated truck body might allow water diffusion into the wall, floor or roof structure. Liquid water conducts 25 times more heat than air. If the material is in a freezing environment, ice trapped in it would conduct even 100 times more heat than air. Therefore water in its different phases has a drastic impact on the insulation performance of core materials.

Two tests are of importance when it comes to moisture pick-up determination:

- >>> Water absorption during long-term immersion
- >>> Moisture pick-up by diffusion - this test is particularly meaningful if composite panels are used in refrigerated vehicle construction.

XENERGY™ Ultra is an insulation material insensitive to moisture, which is characterized by its high resistance to water vapor diffusion. This is one of the reasons why it is an excellent product for refrigerated truck panels where long-term insulating properties are required (**Fig. 08**).

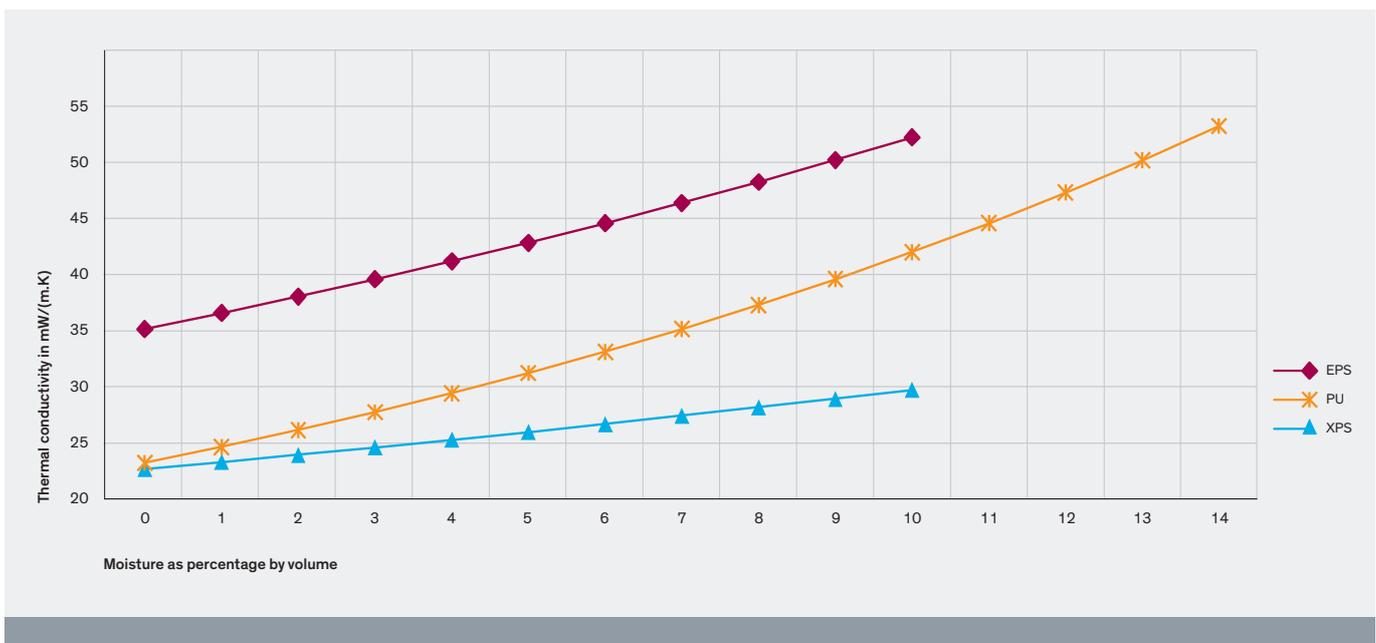


Fig. 08: Effect of moisture content on the thermal conductivity (λ) of foam core materials according to EN ISO 10456

Strength and reliability

XENERGY™ Ultra's mechanical performance

The specification of materials for sandwich panels involves consideration of performance parameters and results of relevant calculations. The excellent mechanical properties of XENERGY™ Ultra allow the use of the grey core in highly-stressed applications. XENERGY™ Ultra is capable to withstand heavy cargo loads but also dynamic loads. Where the expected loads are known, the deflection of a simply supported composite panel, consisting of two facings constantly glued to a foam core, can be calculated relatively precisely with the following equation (Fig. 09).

The important mechanical parameters of the foam core are its compression and shear resistance.

Compression forces affect the core as soon as a supported sandwich panel receives a vertical load. If the maximum compression load of the foam core is exceeded its cell structure collapses and the sandwich panel is crushed. Shear forces come into play as soon as a sandwich panel is loaded by bending.

$$d = k_f \frac{P \cdot \ell^3}{E \cdot I} + k_c \frac{P \cdot \ell}{G \cdot A}$$

= flexural deflection + shear deflection for sandwich panels with thin facings

d = Deflection
 P = Load
 ℓ = Span
 E = Elastic modulus
 I = Moment of inertia
 G = Shear modulus
 A = Area
 k = Specific coefficient

Fig. 09: Deflection calculation

Tensile forces affect the core material when, for example, heavy loads are attached to a roof or ceiling panel. If the maximum permissible force is exceeded the panel may undergo plastic deformation (no longer return to its original shape) or even tear. All of those effects of forces are simulated in the Ravago Building Solutions laboratory in order to determine the loading limits of the foam core and also of finished and bonded sandwich panels.

		k_f	k_c
Simply supported beam, uniformly distributed load		$\frac{5}{384}$	$\frac{1}{8}$
Simply supported beam, central point load		$\frac{1}{48}$	$\frac{1}{4}$
Simply supported beam, point loads at $\ell/4$ span from the supports		$\frac{11}{768}$	$\frac{1}{8}$
Cantilever, uniformly distributed load		$\frac{1}{8}$	$\frac{1}{2}$
Cantilever, point load at free end		$\frac{1}{3}$	1

Fig. 10: Deflection calculation

Strength and reliability

XENERGY™ Ultra's mechanical performance

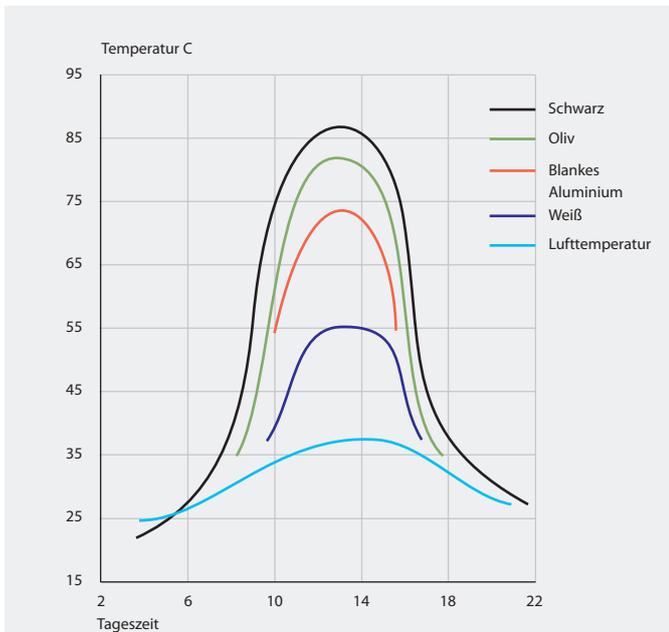


Fig. 11: Testing creep performance in Ravago Building Solutions's dedicated laboratory

In creep tests, Ravago Building Solutions investigates how its products behave over long periods under constant load. Ravago Building Solutions has its own laboratory with dedicated equipment being capable of measuring compressive creep of XENERGY™ Ultra products - this is **unique in the industry**.

XENERGY™ Ultra has excellent creep behavior: it is measured according to EN 1606 allowing a maximum deformation of 2% after 50 years of constant loading with 30% of the static compressive load measured according to EN 826. The test duration of 50 years can be reduced to 2 years by making use of an extrapolation. In addition to mechanical loads, the constructor must also consider thermal and other stresses occurring during use. When exposed to high summer temperatures and intense sunshine, the outside of a dark-painted truck body becomes significantly hotter than ambient temperature. With black facings temperatures close to or above 90°C can be reached.

With light-colored facings, the energy consumption of the cooling unit and the thermal stresses in the sandwich panels are expected to be lower than with dark colored facings, since the temperature gradient through the panel is reduced. With such light-colored facings and service temperatures below +75°C, XENERGY™ Ultra has an excellent suitability in the industry.



The data refer to a 100 mm thick composite panel with XENERGY™ Ultra core and aluminium facings exposed horizontally in still air.

Fig. 12: Panel surface temperature with solar exposure

Tests and structural calculations make it possible to take mechanical load cases as well as thermal and other stresses into consideration in the design of a sandwich panel. The results of construction calculations may require another material or material thickness to be chosen or require the construction to be modified. Calculations should be verified by testing.

A very important load case in a truck body is the dynamic load event. Dynamic load events are initiated in trucks through the general service on the road and loading and unloading, often involving forklifts. Empty and fully loaded forklifts moving on the floor construction result in significant load exposed both to the floor and may also impact the entire body.

Such events are too complex to be defined in a single, static test, but dynamic laboratory test can provide some conclusion on fracture behavior – which in turn helps manufacturers to select appropriate materials that are equipped to deal with the various stresses they are likely to undergo during a truck's lifetime.

Assuming a truck is in service an average of eight years (250 days a year in service), test have to be run with more than 500.000 load cycles.

To fully cope with the assumption that a truck is in service an average of eight years (250 days a year in service), tests have been run with > 500.000 load cycles.



Fig. 13: Dynamic test on sandwich panels with XENERGY™ Ultra core

For XENERGY™ HD300-Ultra a s/n-curve was generated internally, showing the relation between the dynamic shear stress and the amount of cycles the sample has been exposed to. According to this particular s/n-curve XENERGY™ HD300-Ultra resists > 600.000 load cycles when applying a dynamic load representing 50% of the measured maximum static load according to EN 12090. Ravago Building Solutions makes use of in-house fatigue testing equipment to control the fatigue behavior of XENERGY™ Ultra products and to work on product developments in this respect.

Tailored to fit

Production capabilities

XENERGY™ Ultra extruded polystyrene foam panels are produced with a flat, dust-free surface and tight tolerances. Hot-wire foam cutting equipment allows to cut core layers of as thin as 5 mm from XENERGY™ Ultra blocks.

The oscillating hot-wire cutting equipment utilized by Ravago Building Solutions can achieve a standard thickness tolerance of $\pm 0,5$ mm, but there is also the option of manufacturing products as custom-made items with a thickness tolerance as little as $\pm 0,1$ mm using a sander. Ravago Building Solutions is capable of manufacturing tailor-made product-requests for specific dimensions or particular tolerances. these could be

Production type	Thickness tolerance
Online	Standard $\pm 0,5$ mm CT $\pm 0,3$ mm
Hot-wire cut (OF)	(<15 mm) 0,5 mm (≥ 15 mm) 0,3 mm
Quick sanded (QS)	(≥ 10 mm) 0,3 mm
Sanded (SA)	(≥ 10 mm) 0,1 mm

arranged with the responsible engineer.

Panels with grooves can also be produced on request. Grooves may assist the bonding process by enabling an easier air release and facilitating the even distribution of adhesive. (Standard grooves for product thickness >15 mm: 39 mm groove spacing; 3,5 mm deep, 1,8 mm wide). In addition to processing using hot-wire equipment, XENERGY™ Ultra panels can be simply and cleanly cut using conventional tools and machines from the timber industry.



Fig. 14: Oscillating hot-wire cutting machine

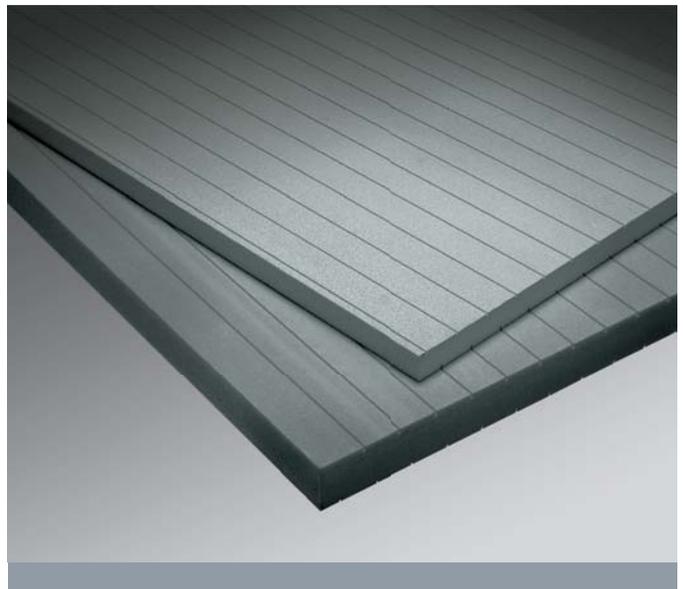


Fig. 15: grooved XENERGY™ RTM-Ultra



Fig. 16: Application of a 2 component PU adhesive



Fig. 17: Vacuum Table

For bonding purpose with e.g. aluminium, wood and GRP, solvent-free adhesives are strongly recommended.

The use of polyurethane adhesives, as 1C and 2C (component) PU adhesives and also reactive hotmelt adhesives can be successfully used in combination with XENERGY™ Ultra.

Related to the adhesion process, Ravago Building Solutions offers different grooving and surface qualities.

Where hydraulic, pneumatic or roller presses are used, the assembly of the sandwich panel takes place at a separate production station; with a vacuum table, all production stages are carried out directly on the table itself.

Vacuum tables are generally used in vehicle construction with the negative pressure helping to press the sandwich panel together.

In this way, the adhesive is evenly distributed to produce a sandwich panel of a constant thickness and with an optically flawless surface.

A vacuum pump produces a negative pressure of approximately 150 to 600 mbar. This corresponds to a surface pressure of approx. 15 to 60 kN/m²; the optimum negative pressure in each case must be determined experimentally for the cores and facings.

A quality approach

Customer focus

Ravago Building Solutions undertakes rigorous quality management during and after the production of XENERGY™ Ultra in order to manufacture consistently high quality products.

On a regular basis samples of the production runs are taken to check key properties such as dimensions, density, fresh lambda, compressive strength and others.

Selective product analyses are also conducted in the central Research and Development Department's laboratories.

This is where application-specific properties, including shear strength, tensile strength, lambda after 60 days and water pick-up are regularly checked. Data are captured in a database, shared and constantly monitored in all plants.

Regular external inspections of our products are conducted by certified European testing and inspection organizations.

The majority of Ravago Building Solutions XPS products are CE marked.

Declaration of Performance (DoP) are available on demand and quality systems are based on the ISO 9000 standard.

Laboratory and test benches also support material research and the development of new application solutions.

Customers are frequently involved in work on specific solutions for composite production - for example, when it comes to stringent requirements in terms of surface finishes or the development of specific testing methods.

Based on decades of experience in the use of extruded polystyrene as a core material and on modern simulation programs, Ravago Building Solutions's experts regularly assist customers with the structural design and development of their products and the development team of the Core Composites business is willing to help establish the suitable product for each specific application.



Technical data

Properties	Standard	Unit	XENERGY™ RTM Ultra	XENERGY™ HD300 Ultra	CE-Code
Cell content	–	–	HFC	HFC	–
Density (typical value)	EN 1602	kg/m ³	40	45	–
Thermal conductivity declared (λ_D)	EN 13164	W/(m.K)	0,027 ¹⁾	0,027 ¹⁾	λ_D
Thermal conductivity for 60 days old foam - mean value at 10°C	EN 12667 EN 12939	W/(m.K)	0,023	0,023	λ -mean, 60d
Thermal conductivity for 30 days old foam - mean value at 10°C	EN 12667 EN 12939	W/(m.K)	0,022	0,022	–
Compressive stress or compressive strength @ 10% deformation ²⁾	EN 826	kPa	400	700	–
Tensile strength ²⁾	EN 1607	kPa	900	1200	TR
Shear strength	EN 12090	kPa	400	500	SS
Compressive creep after 50 years $\leq 2\%$ deformation under stress σ_c ²⁾	EN 1606	kPa	140	210	CC(2/1,5/50) σ_c
Moduli (typical values) E-Modulus ²⁾	EN 826	MPa	17 (≤ 30 mm) 22 (31 – 80 mm) 28 (> 80 mm)	33 (30 – 80 mm) 38 (> 80 mm)	–
Tensile modulus ²⁾	EN 1607	MPa	28 (≥ 50 mm)	31 (≥ 50 mm)	–
Shear modulus G ³⁾	EN 12090	MPa	10	14	–
Water vapour diffusion resistance factor μ (tabulated value)	ISO10456	–	150	150	MU
Long term water absorption by total immersion	EN 12087	Class	1,5	0,7	WL(T)
Dimensional stability under specified temperature (70°C) and humidity conditions (90%rh)	EN 1604	%	5	5	DS(70,90)
Deformation under specified compressive load (40 kPa) and temperature (70°C) conditions	EN 1605	%	–	5	DLT(2)5
Capillarity	–	%	0	0	–
Coefficient of linear thermal expansion (typical value)	–	mm/(m.K)	0,07	0,07	–
Reaction to fire Euroclass	EN 13501-1	–	E	E	–
Temperature limits	–	°C	-50/+75		–
Dimensions ⁴⁾					
Thickness	EN 823	mm	20–140	40–110	–
Width	EN 822	mm	600–1200	600	–
Length	EN 822	mm	2500 / 3000		–
Tolerances					
Thickness	EN 823	mm	-/+0,5	-/+0,5	T
Width	EN 822	mm	< 700 mm: -0/+3 ≥ 700 mm: -0/+5	-0/+3	–
Length	EN 822	mm	-0/+10	-0/+10	–
Edge Profile	–	–	butt edge		–
Surface Finish	–	–	planed/grooved		–

1) Pending certification.

2) Measured in thickness direction.

3) It may vary with the in-plane direction.

4) Products with special dimensions or closer tolerances are available upon request.

1 N/mm² = 10³ kPa; 1 kPa = 10⁻³ MPa.

Important information

Please follow the application guidelines issued by Ravago Building Solutions. XPS melt at high temperatures. The recommended maximum temperature for continuous use XENERGY™ Ultra is 75°C.

Please note that on hot summer days XENERGY™ Ultra panels should not be covered with dark coatings/coverings (sealants, fleece, matting), otherwise the insulation panels may become distorted. When bonding XENERGY™ Ultra panels with colored outer layers, temperature changes on the surface of the outer layers should be monitored. Avoid using dark outer layers.

Should XENERGY™ Ultra panels come into contact with materials, which contain volatile substances, solvent damage could occur. When choosing an adhesive, please follow the manufacturer's instructions regarding usability for bonding polystyrene foam.

To prevent weathering of the foam surface or deterioration during long periods of storage outdoors, panels should be protected from direct sunlight. White colored protective packaging should be applied in case an outside storage must be considered. Dark colored or clear film should be avoided in case of outside storage as this could lead to a build-up of heat.

Panels should be stored on a clean, level surface, away from flammable materials. Panels contain a flame-retardant additive, which should prevent accidental ignition by a small naked flame. However, panels are flammable and could ignite if they are not professionally processed or used incorrectly. Therefore, during shipping and storage as well as during and after installation, these materials should not come into contact with naked flames or other ignition sources/flammable substances.

All flammability classifications are based on laboratory tests and do not necessarily reflect the behavior of the material in the final application under actual fire conditions.

After processing, panels should be suitably protected against direct exposure to fire in accordance with National regulations.

Fire protection requirements are outlined in National regulations, which must be complied with.

Recommendations regarding methods, use of materials and structural details have been devised on the basis of Ravago Building Solutions's experience. These recommendations are only provided as a service. The corresponding diagrams/drawings are designed to only provide information on possible types of uses and are not intended to be used as construction documents.

Table of images

Fig. 01, 04, 14, 16, 17

BAER BV Zomerdijkweg 55 145 PK Waalwijk

Fig. 02, 03, 11, 13, 15

Ravago Building Solutions Deutschland Inc.

Note:

The information and data contained in this brochure do not represent exact sales specifications. The features of the products mentioned may vary. The information contained in this document has been provided in good faith, however it does not imply any liability, guarantee or assurance of product performance. It is the purchaser's responsibility to determine whether these Ravago Building Solutions products are suitable for the application desired and to ensure that the site of work and method of application conform with current legislation. No licence is hereby granted for the use of patents or other industrial or intellectual property rights. If Ravago Building Solutions products are purchased, we advise following the most up-to-date suggestions and recommendations.



Technical service:
+49 6196 566 - 100

Ravago Building Solutions
www.ravatherm.com